



0603, RoHS Compliant & Pb-Free SURFACE MOUNT CHIP FUSE (FAST-BLOW)

INTERRUPTING CAPACITY /

50A 32V AC (200mA-1A) 35A 32V AC (1.2A-5A)
 50A 63V DC (200mA-250mA) 50A 32V DC (300mA-1A)
 35A 32V DC (1.2A-5A)

TECHNICAL PARAMETERS/

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证				REFERENCE (A ² ·Sec.) (RoHS) I ² T 参考值
		UR		cUR		
		L1	L2	L1	L2	
06F-0200L	200mA	●	●	●	●	0.00056
06F-0250L	250mA	●	●	●	●	0.00078
06F-0315L	315mA	●		●		0.00083
06F-0375L	375mA	●		●		0.00115
06F-0400L	400mA	●		●		0.00135
06F-0500L	500mA	●		●		0.0069
06F-0630L	630mA	●		●		0.0072
06F-0750L	750mA	●		●		0.017
06F-0800L	800mA	●		●		0.019
06F-010L	1A	●		●		0.041
06F-012L	1.2A	●		●		0.043
06F-013L	1.25A	●		●		0.045
06F-015L	1.5A	●		●		0.078
06F-016L	1.6A	●		●		0.076
06F-020L	2A	●		●		0.130
06F-025L	2.5A	●		●		0.180
06F-030L	3.0A	●		●		0.280
06F-032L	3.15A	●		●		0.32
06F-035L	3.5A	●		●		0.361
06F-040L	4A	●		●		0.408
06F-050L	5A	●		●		1.100

DENOTES FOR APPROVED

L1 DENOTES FOR 32V L1 32V
 L2 DENOTES FOR 63V L2 63V


ELECTRICAL CHARACTERISTICS/

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
250%	10 seconds Max. 最慢 10 秒 (200mA-3A)
350%	1 second Max. 最慢 1 秒 (3.15A-5A)

Standards/ UL 248-1, UL 248-14

Operating Temperature/ -55 ~125
 Storing Temperature/ -55 ~85
 Resistance to soldering heat/ 260 10s Max.
 Solderability/ 235 ± 5 , 3.5s+0.5/-0s

Dimensions/

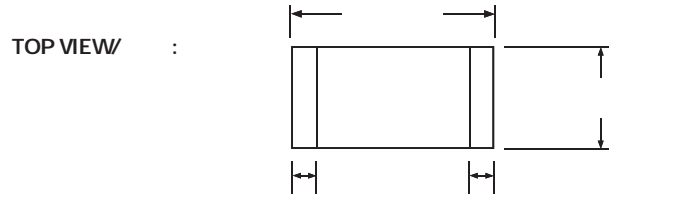

SIDE VIEW



PACKING/

5,000 PIECES TAPED AND REELED IN ONE BOX
 5,000

BOX SIZE/

Unit mm

O6F AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

O6F I-T ()

TIME(s)/时间(秒)

CURRENT(A)/ 电流 (安培)