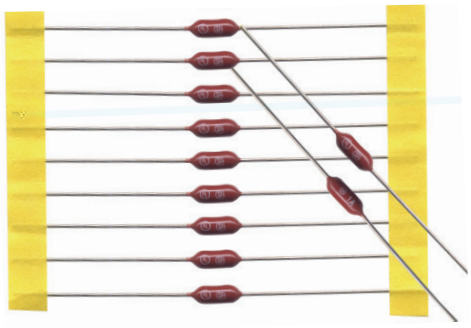

Ⓗ 20S

Φ2.4x7mm, RoHS Compliant & Pb-Free
MICROFUSE (MEDIUM SLOW-BLOW)

INTERRUPTING CAPACITY /
50 amperes at 125V/250V AC (200mA-10A)
100 amperes at 125V AC (1A-5A) PSE

TECHNICAL PARAMETERS/ :

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A^2.Sec.) (RoHS) I^2T 参考值
		CCC	UL(cUL)		CSA		PSE	
		H	H	L	H	L	L	
20S-0200H/L	200mA	●	●	●	●	●		0.01230
20S-0250H/L	250mA	●	●	●	●	●		0.02431
20S-0300H/L	300mA		●	●	●	●		0.03270
20S-0315H/L	315mA	●	●	●	●	●		0.03671
20S-0350H/L	350mA		●	●	●	●		0.04738
20S-0375H/L	375mA		●	●	●	●		0.06790
20S-0400H/L	400mA		●	●	●	●		0.08190
20S-0500H/L	500mA	●	●	●	●	●		0.1543
20S-0600H/L	600mA		●	●	●	●		0.1591
20S-0630H/L	630mA	●	●	●	●	●		0.2808
20S-0700H/L	700mA	●	●	●	●	●		0.3874
20S-0750H/L	750mA		●	●	●	●		0.4989
20S-0800H/L	800mA	●	●	●	●	●		0.6133
20S-010H/L	1A	●	●	●	●	●	●	0.9903
20S-012H/L	1.2A		●	●	●	●	●	1.435
20S-013H/L	1.25A	●	●	●	●	●	●	1.749
20S-015H/L	1.5A		●	●	●	●	●	2.002
20S-016H/L	1.6A	●	●	●	●	●	●	2.374
20S-020H/L	2A	●	●	●	●	●	●	4.334
20S-023H/L	2.25A	●	●	●	●	●	●	6.002
20S-025H/L	2.5A	●	●	●	●	●	●	7.569
20S-030H/L	3A		●	●	●	●	●	11.64
20S-032H/L	3.15A	●	●	●	●	●	●	12.20
20S-035H/L	3.5A		●	●	●	●	●	15.72
20S-040H/L	4A	●	●	●	●	●	●	20.88
20S-050H/L	5A	●	●	●	●	●	●	42.76
20S-060H/L	6A		●	●	●	●		58.61
20S-063H/L	6.3A	●	●	●	●	●		67.99
20S-070H/L	7A		●	●	●	●		92.44
20S-080H/L	8A		●	●	●	●		74.48
20S-090H/L	9A		●	●	●	●		93.07
20S-100H/L	10A		●	●	●	●		153.6

● **DENOTES FOR APPROVED** ●
H DENOTES FOR 250V **H 250V**
L DENOTES FOR 125V **L 125V**

ELECTRICAL CHARACTERISTICS/ :

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

Dimensions/ :

►

Standards/ UL 248-1, UL 248-14
Operating Temperature/ -55 ~125
Storaging Temperature/ -55 ~85
Resistance to soldering heat/ 260 10s Max.
Solderability/ 245 ± 5 , 5s ± 0.5s

20S AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)
20S I-T ( )

PACKING/
1. INNER BOX/ : AMMO PACK

2. OUTER CARTON/ : 10 INNER BOXES / CARTON
CARTON SIZE / L440x W270 x H230(mm)