



Ⓜ 31S, 32S   

Φ3.6x10mm, RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (SLOW-BLOW)

INTERRUPTING CAPACITY /

50 amperes at 125V AC (100mA-10A)
50 amperes at 250V AC (100mA-10A)

TECHNICAL PARAMETERS/

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证				REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UL/cUL		CSA		
		H	L	H	L	
31S,32S-0100H/L	100mA		●	●		0.02127
31S,32S-0125H/L	125mA	●	●	●	●	0.02058
31S,32S-0150H/L	150mA	●	●	●	●	0.04566
31S,32S-0160H/L	160mA	●	●	●	●	0.04362
31S,32S-0200H/L	200mA	●	●	●	●	0.07841
31S,32S-0250H/L	250mA	●	●	●	●	0.1531
31S,32S-0300H/L	300mA	●	●	●	●	0.2431
31S,32S-0315H/L	315mA	●	●	●	●	0.2107
31S,32S-0350H/L	350mA	●	●	●	●	0.5416
31S,32S-0375H/L	375mA	●	●	●	●	0.5196
31S,32S-0400H/L	400mA	●	●	●	●	0.4975
31S,32S-0500H/L	500mA	●	●	●	●	0.7752
31S,32S-0600H/L	600mA	●	●	●	●	0.9302
31S,32S-0630H/L	630mA	●	●	●	●	1.623
31S,32S-0750H/L	750mA	●	●	●	●	1.508
31S,32S-0800H/L	800mA	●	●	●	●	0.4494
31S,32S-010H/L	1A	●	●	●	●	1.104
31S,32S-012H/L	1.2A	●	●	●	●	1.548
31S,32S-013H/L	1.25A	●	●	●	●	1.612
31S,32S-015H/L	1.5A	●	●	●	●	2.534
31S,32S-016H/L	1.6A	●	●	●	●	2.940
31S,32S-020H/L	2A	●	●	●	●	5.579
31S,32S-023H/L	2.25A	●	●	●	●	6.276
31S,32S-025H/L	2.5A	●	●	●	●	3.375
31S,32S-030H/L	3A	●	●	●	●	5.342
31S,32S-032H/L	3.15A	●	●	●	●	5.854
31S,32S-035H/L	3.5A	●	●	●	●	7.045
31S,32S-040H/L	4A	●	●	●	●	11.05
31S,32S-050H/L	5A	●	●	●	●	18.64
31S,32S-060H/L	6A	●	●	●	●	29.38
31S,32S-063H/L	6.3A	●	●	●	●	32.13
31S,32S-070H/L	7A	●	●	●	●	44.28
31S,32S-080H/L	8A	●	●	●	●	56.69
31S,32S-090H/L	9A	●	●	●	●	82.90
31S,32S-100H/L	10A	●	●	●	●	109.1
31S,32S-120H/L	12A					150.7
31S,32S-150H/L	15A					337.4

DENOTES FOR APPROVED


H DENOTES FOR 250V H 250V
L DENOTES FOR 125V L 125V

cUL APPROVAL IS EQUIVALENT TO CSA APPROVAL cJL
CSA

ELECTRICAL CHARACTERISTICS/

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒

Dimensions/

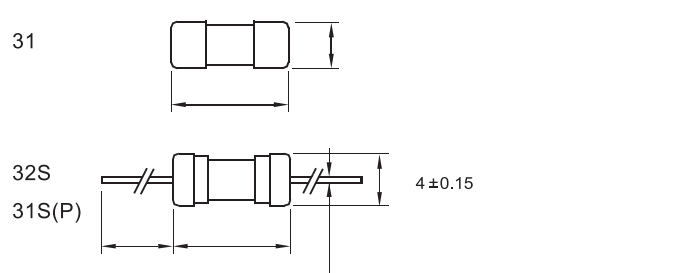

31S/32S AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

31S/32S I-T ()

Standards/ UL 248-1, UL 248-14

Operating Temperature/ -55 ~125

Storing Temperature/ -55 ~85

Resistance to soldering heat/ 260 10s Max.

Solderability/ 245 ± 5 , 5s± 0.5s

CURRENT(A)/ 电流 (安培)