




1032, RoHS Compliant SMD NANO FUSE (FAST-BLOW)


INTERRUPTING CAPACITY /
 200A at 250V AC 300A at 125V DC
 1000A at 32V DC 600A at 75V DC

Dimensions/

Unit mm

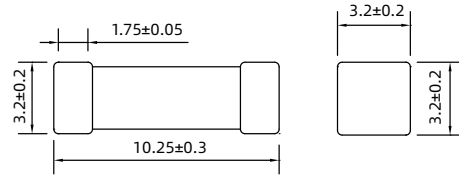

Land Pattern:

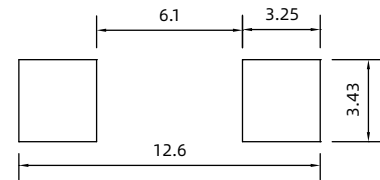

TECHNICAL PARAMETERS/

PART NO. 目录编号	CURRENT RATING 额定电流	RATED VOLTAGE 额定电压	SAFETY APPROVALS 安全认证					REFERENCE (A²·Sec.) (RoHS) I²T 参考值
			cURus				PSE	
			H	L	L1	L2	H	
3NF-050H/L/L1/L2	5A		●	●	●	●		
3NF-063H/L/L1/L2	6.3A		●	●	●	●	●	
3NF-080H/L/L1/L2	8A		●	●	●	●	●	
3NF-100H/L/L1/L2	10A		●	●	●	●	●	
3NF-120H/L/L1/L2	12A		●	●	●	●	●	
3NF-150H/L/L1/L2	15A		●	●	●	●	●	
3NF-160H/L/L1/L2	16A	250V AC 125V DC	●	●	●	●	●	307
3NF-200H/L/L1/L2	20A	75V DC 32V DC	●	●	●	●	●	961
3NF-250H/L/L1/L2	25A		●	●	●	●	●	963
3NF-300H/L/L1/L2	30A		●	●	●	●	●	784
3NF-350H/L/L1/L2	35A		●	●	●	●	●	1167
3NF-400H/L/L1/L2	40A		●	●	●	●	●	1400
3NF-500H/L/L1/L2	50A		●	●	●	●	●	2116
3NF-600H/L/L1/L2	60A		●	●	●	●	●	5000

DENOTES FOR APPROVED

H DENOTES FOR 250V	H	250V
L DENOTES FOR 125V	L	125V
L1 DENOTES FOR 125V	L1	75V
L2 DENOTES FOR 65V	L2	32V

ELECTRICAL CHARACTERISTICS/

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

UL 248-1, UL 248-14

Operating Temperature: -55 +125 .

Storing Temperature: -55 +85 .


: IEC IEC60068-2-58

IEC IEC60068-2-58

PACKING/

2,000 PIECES TAPED AND REELED IN ONE BOX

2,000

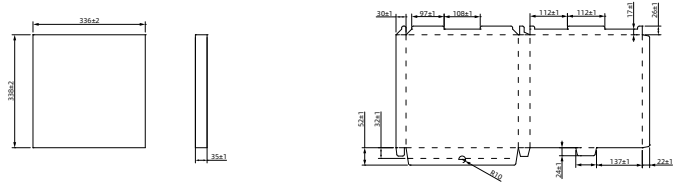

Unit mm

3NF THE AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

3NF I-T ()

