

1032, RoHS Compliant
SMD NANO FUSE (SLOW-BLOW)

TECHNICAL PARAMETERS/ :

PART NO. 目录编号	CURRENT RATING 额定电流	RATED VOLTAGE 额定电压	SAFETY APPROVALS 安全认证	
			cURus	
			H	L
3NT-0200H/L	200mA		●	●
3NT-0250H/L	250mA		●	●
3NT-0320H/L	315mA		●	●
3NT-0400H/L	400mA		●	●
3NT-0500H/L	500mA		●	●
3NT-0630H/L	630mA		●	●
3NT-0800H/L	800mA		●	●
3NT-010H/L	1A		●	●
3NT-013H/L	1.25A	125V DC	●	●
3NT-016H/L	1.6A	125V AC	●	●
3NT-020H/L	2A	250V AC	●	●
3NT-025H/L	2.5A		●	●
3NT-032H/L	3.15A		●	●
3NT-040H/L	4A		●	●
3NT-050H/L	5A		●	●
3NT-063H/L	6.3A		●	●
3NT-080H/L	8A		●	●
3NT-100H/L	10A		●	●

DENOTES FOR APPROVED
 H DENOTES FOR 250V H 250V
 L DENOTES FOR 125V L 125V

ELECTRICAL CHARACTERISTICS/ :

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	120 seconds Max.	最慢 120 秒

Standards/ UL 248-1, UL 248-14

Operating Temperature: -55 +125 .

Storaging Temperature: -55 +85 .

: IEC IEC60068-2-58

IEC IEC60068-2-58


INTERRUPTING CAPACITY /

50A at 250V AC


100A at 125V AC/DC

Dimensions/

Unit mm

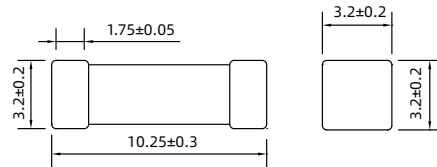

Land Pattern:



PACKING/

3NT THE AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

3NT I-T ()

