



RoHS Compliant & Pb-Free
SMD NANO FUSE (SLOW-BLOW)

TECHNICAL PARAMETERS/ :

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证 UR/cUR	REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
4NT-0500H/L	500mA	●	1.30
4NT-0630H/L	630mA	●	2.15
4NT-0800H/L	800mA	●	3.60
4NT-010H/L	1A	●	7.20
4NT-013H/L	1.25A	●	13.00
4NT-016H/L	1.6A	●	16.24
4NT-020H/L	2A	●	28.00
4NT-025H/L	2.5A	●	50.00
4NT-032H/L	3.15A	●	85.00
4NT-035H/L	3.5A	●	112.00
4NT-040H/L	4A	●	141.00
4NT-050H/L	5A	●	190.00

DENOTES FOR APPROVED

H DENOTES FOR 250V	H	250V
L DENOTES FOR 125V	L	125V

ELECTRICAL CHARACTERISTICS/ :

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
250%	60s Max.	最慢 60 秒

Standards/	UL 248-1, UL 248-14		
Operating Temperature/	-55	-90	
Storing Temperature/	-55	~85	
Resistance to soldering heat/	260 ± 5	10s	Max
Solderability/	235 ± 5	3.5+0.5/-0s	

PACKING/

1,500 PIECES TAPED AND REELED IN ONE BOX

1,500


BOX SIZE/

INTERRUPTING CAPACITY /

150A at 250V AC/DC
500A at 125V AC/DC

Dimensions/

Unit mm

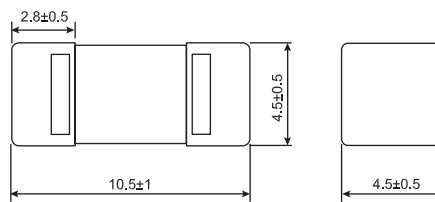

Land Pattern:



5

4NT AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

4NT I-T ()

TIME(S)/时间(秒)

CURRENT(A)/ 电流 (安培)