




---

Φ6.35x32mm, RoHS Compliant & Pb-Free  
CERAMIC TUBE FUSE (FAST-ACTING)

---

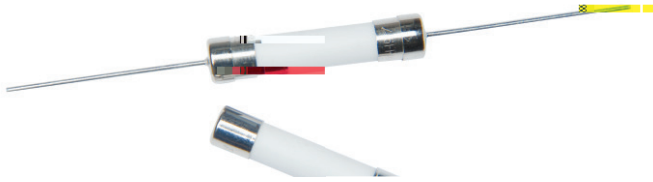

---

**INTERRUPTING CAPACITY /**  
10000 amperes at 500V AC/DC UR/CUR  
10000 amperes at 500V AC/DC (30A)TUV

---

Standards/	IEC 60127		
Operating Temperature/	-55	~125	
Storing Temperature/	-55	~85	
Resistance to soldering heat/	260	10s	Max
Solderability/	245 ± 5	, 5s ± 0.5s	