


(TH SERIES)



THERMAL LINKS

Dimensions/ : Unit mm

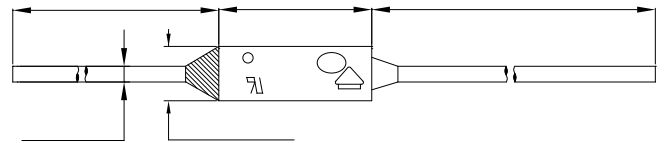

APPLICATION FOR:

Refrigerator; Air-conditioner; Washing machine; Cleaner; Electric tool; Hair drier; Iron; Mangle; Electric radiator; Electric rice cooker; Electric work; Electric fry pan; Induction cooker; Sandwich maker; Coffee maker; Electric kettle; Electric mug; Water heater; Cold & Hot water dispenser; TV set; Music center; Computer; Aviation instrument; Copier; Transformer; Capacitor; etc.

TECHNICAL PARAMETERS/ :

PART NO. 目录编号	额定动作温度		保持温度		极限温度		额定电流 Rated current (Ir)	额定电压 Rated voltage AC (Ur)	RoHS 符合 RoHS Compliance
	Rated functioning temp.(Tf)		Holding temp.(Th °C )		Maximum temp. limit(Tm °C )				
	规格值	实测值	规格值	实测值	规格值	实测值			
TH72	72°C	70+/-2°C	45	58	150	300	10A	250V	●
TH77	77°C	74+/-2°C	55	62	120	300	10A	250V	●
TH84	84°C	84+/-2°C	60	69	125	300	10A	250V	●
TH94	94°C	94+0/-5°C	66	79	150	300	10A	250V	●
TH99	99°C	99+0/-5°C	71	84	150	300	10A	250V	●
TH105	105°C	104+0/-5°C	80	90	150	300	10A	250V	●
TH110	110°C	110+0/-5°C	88	98	150	300	10A	250V	●
TH113	113°C	110+/-2°C	88	98	150	400	10A	250V	●
TH121	121°C	121+0/-5°C	94	106	150	400	10A	250V	●
TH128	128°C	128+0/-5°C	106	113	155	400	10A	250V	●
TH133	133°C	131+/-2°C	104	119	159	400	10A	250V	●
TH142	142°C	142+0/-5°C	114	127	159	400	10A	250V	●
TH152	152°C	152+0/-5°C	128	137	176	400	10A	250V	●
TH157	157°C	155+/-2°C	127	142	172	400	10A	250V	●
TH167	167°C	167+0/-5°C	146	152	190	400	10A	250V	●
TH172	172°C	170+/-2°C	144	157	189	400	10A	250V	●
TH184	184°C	182+/-2°C	160	169	214	400	10A	250V	●
TH192	192°C	189+/-2°C	164	177	300	400	10A	250V	●
TH216	216°C	216+0/-5°C	189	191	350	450	10A	250V	●
TH228	228°C	226+/-2°C	190	201	300	450	10A	250V	●
TH240	240°C	240+0/-5°C	190	201	350	450	10A	250V	●
TH257	257°C	257+0/-5°C	220	220	470	470	10A	250V	●

●YES 符合