

# H1FD 200A-900A

Class of operation: aR

保护特性: aR

Standard/ IEC 60269-4, GB/T 13539.4, UL248-13

**INTERRUPTING CAPACITY/**

200,000 amperes at 690V AC (200-800A)  
 200,000 amperes at 550V AC (900A)

**TECHNICAL PARAMETERS/**

PART NO. 目录编号	额定电流	额定电压	SAFETY APPROVALS	
	Rated Current	Rated Voltage	安全认证	
			CCC	TUV
H1FD200	200A	690V AC	○	○
H1FD250	250A		○	○
H1FD315	315A		○	○
H1FD350	350A		○	○
H1FD400	400A		○	○
H1FD450	450A		○	○
H1FD500	500A		○	○
H1FD550	550A		○	○
H1FD630	630A		○	○
H1FD700	700A		○	○
H1FD800	800A	550V AC	○	○
H1FD900	900A		○	○


● DENOTES FOR APPROVAL  
 ○ DENOTES FOR PENDING

● 表示已取得安全认证  
 ○ 表示正在申请安全认证

Unit 单位: mm

**Dimensions/**

Type:H1FD Part No.:H1FD(amp rating)

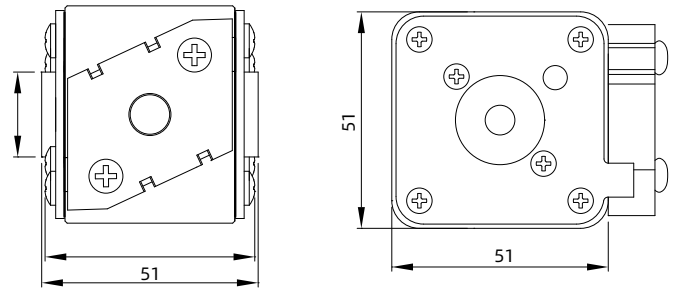

可选配件 Optional Accessory

目录编号 PART NO.

微动开关 Microswitches

H1FD(amp rating)

HMC-01