

HBE 35A-400A

Semiconductor Fuses

半导体保护熔断器



Standard/ IEC 60269-4, GB/T 13539.4, UL 248-13

INTERRUPTING CAPACITY /
 100,000 amperes at 1000V AC
 50,000 amperes at 750V DC




TECHNICAL PARAMETERS/ :

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		cURus	
HBE35	35A	○	
HBE40	40A	○	
HBE50	50A	○	
HBE60	60A	○	
HBE70	70A	●	
HBE80	80A	●	
HBE90	90A	●	
HBE100	100A	●	
HBE125	125A	●	
HBE150	150A	●	
HBE175	175A	●	
HBE200	200A	●	
HBE225	225A	●	
HBE250	250A	●	
HBE300	300A	●	
HBE350	350A	●	
HBE400	400A	●	


● DENOTES FOR APPROVAL
 ○ DENOTES FOR PENDING

● 表示已取得安全认证
 ○ 表示正在申请安全认证

Dimensions/ : Unit 单位: mm

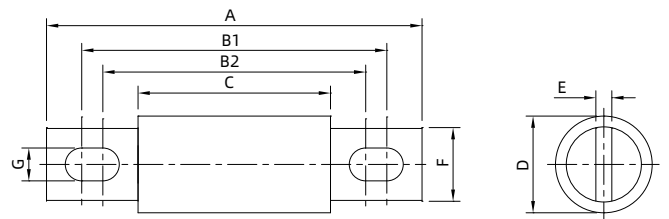

HBE 平均 I-T 曲线图 (仅供参考)
 AVERAGE I-T CHARACTERISTICS CURVE
 (FOR REFERENCE ONLY)

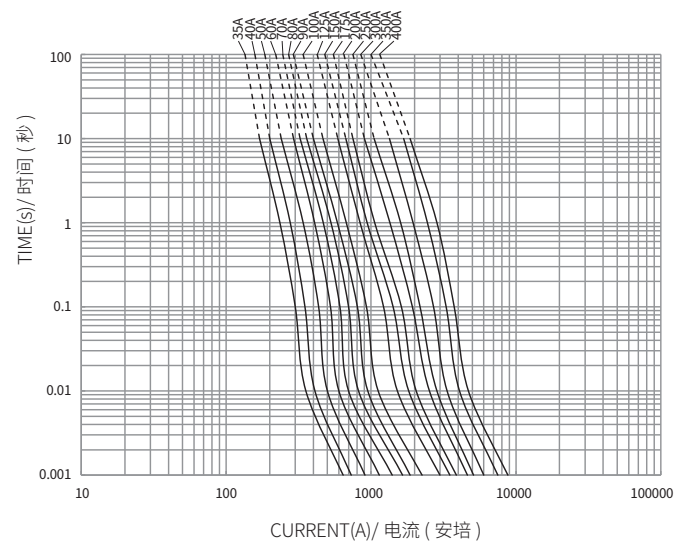

额定电流 Current Rating A	尺寸 Dimensions(mm)							
	A±2	B1±2	B2±2	C±1.5	D±1	E±0.5	F±1	G±1
35A-60A	125	110	104.6	87	25	3.2	18	8.2
70A-100A	126	108.6	105	87	31	4.8	24	8.6
110A-200A	143	121	107.4	87	38	6.4	25.4	10.4
225A-400A	143	123	107.4	87	50.8	6.4	38	10.4