



NH01LgG(-B) 1140V AC 50A-160A

Class of Operation: gG

保护特性: gG


Standard/ IEC 60269.1, GB/T 13539.1

INTERRUPTING CAPACITY /


100,000 A at 1140V AC

Dimensions/ : Unit 单位: mm

Type: NH01LgG Part No.: NH01LgG (amp rating)U11A

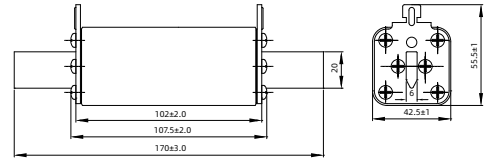


Type: NH01LgG-B Part No.: NH01LgG (amp rating)U11B

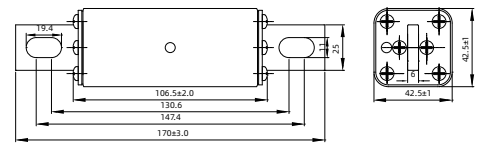

Type: NH01LgG-B Part No.: NH01LgG (amp rating)U11BC

Type: NH01LgG-B Part No.: NH01LgG (amp rating)U11BD

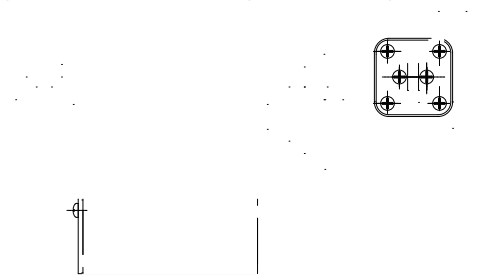

TECHNICAL PARAMETERS/ :

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		CCC	
NH01LgG50U11A	50A	○	○
NH01LgG50U11B			
NH01LgG50U11BC			
NH01LgG50U11BD			
NH01LgG63U11A	63A	○	○
NH01LgG63U11B			
NH01LgG63U11BC			
NH01LgG63U11BD			
NH01LgG80U11A	80A	○	○
NH01LgG80U11B			
NH01LgG80U11BC			
NH01LgG80U11BD			
NH01LgG100U11A	100A	○	○
NH01LgG100U11B			
NH01LgG100U11BC			
NH01LgG100U11BD			
NH01LgG125U11A	125A	○	○
NH01LgG125U11B			
NH01LgG125U11BC			
NH01LgG125U11BD			
NH01LgG160U11A	160A	○	○
NH01LgG160U11B			
NH01LgG160U11BC			
NH01LgG160U11BD			

U11DENOTES FOR 1140V AC

● DENOTES FOR APPROVAL

○ DENOTES FOR PENDING

U11 表示 1140V AC

● 表示已取得安全认证

○ 表示正在申请安全认证

ELECTRICAL CHARACTERISTICS/ :

Rated Current In(A) 额定电流 In(A)	CONVENTIONAL TIME(H) 约定时间	CONVENTIONAL CURRENT 约定电流	
		CONVENTIONAL NON-FUSING CURRENT(A) 约定不熔断电流	CONVENTIONAL FUSING CURRENT(A) 约定熔断电流
In ≤ 63	1	1.25In	1.6In
63 < In ≤ 160	2		

NH01LgG 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE)