



**6BF(P)&6BF-A**  


6.35x32mm, RoHS Compliant & Pb-Free  
**CERAMIC TUBE FUSE (FAST-ACTING)**

**INTERRUPTING CAPACITY /**


10000A at 500V AC/DC  
 30000A at 500V AC/DC

**Dimensions/** : Unif mm

**6BF(P)**

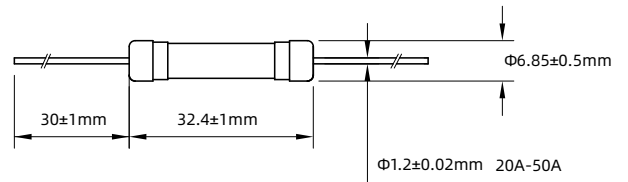

**6BF-A**

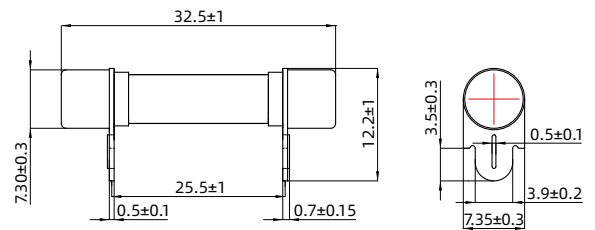

**6BF** RoHS Aheadge I-T Chacdfedefice Cgde  
 (FOR REFERENCE ONLY)

**6BF** RoHS I-T ( )

**TECHNICAL PARAMETERS/**

PART NO.	CURRENT RATING	SAFETY APPROVALS		I <sup>2</sup> T REFERENCE (A <sup>2</sup> .Sec.) (RoHS)
		cURus	TUV	
6BF(P)/6BF-A -200H	20A			/
6BF(P)/6BF-A -250H	25A			159.3
6BF(P)/6BF-A -300H	30A			215.1
6BF(P)/6BF-A -350H	35A			281.7
6BF(P)/6BF-A -400H	40A			315.2
6BF(P)/6BF-A -450H	45A			506.2
6BF(P)/6BF-A -500H	50A			585.2

**DENONTES FOR APPROVAL**

**DENONTES FOR PENDING**

**H DENOTES FOR 500V**

**H 500V**

**ELECTRICAL CHARACTERISTICS/**

% of CURRENT RATING %	BLOWING TIME	
100%	4 hour Min.	1
200%	240seconds Max.	240
1000%	1 seconds Max.	1

**Standards/** **UL248 IEC 60127**

